



MAKING A PLASTER CAST

1 POUR ENOUGH WATER INTO BOWL. ADD POWDER TO WATER.

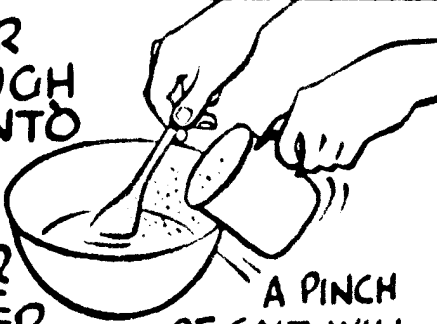


A PINCH OF SALT WILL SPEED-UP THE HARDENING!

2 STIR TO THE CONSISTENCY OF THICK CREAM — NOT TOO THICK AND NOT TOO THIN — BUT THIN ENOUGH TO FILL TINY CREVICES IN TRACK.

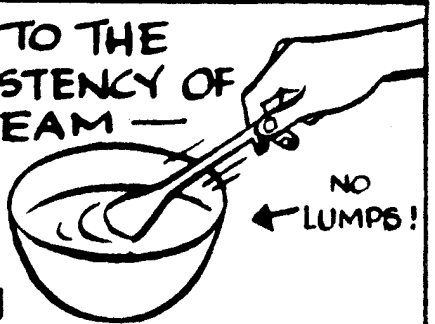


NO LUMPS!

3 SPRINKLE OR BLOW FRENCH CHALK ON TRACK. MAKE A HOOP FROM A CARDBOARD STRIP ABOUT 1½ INCHES X 12 INCHES.

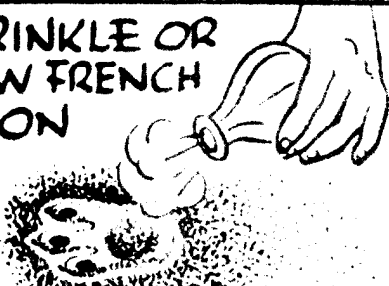


4 SMEAR INSIDE OF RING WITH VASELINE AND FIT IT OVER THE TRACK.

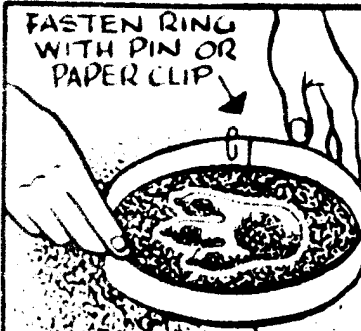


FASTEN RING WITH PIN OR PAPER CLIP

5 POUR PLASTER OVER TRACK UNTIL IT FILLS RING TO ABOUT ½" FROM TOP. LEAVE TO HARDEN FOR 20 MINUTES. DIG OUT CAST.

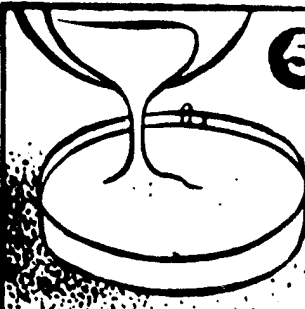

6 REMOVE DIRT WITH SOFT BRUSH. COAT WITH SHELLAC TO PRESERVE. THEN AFFIX LABEL.



DASSIE SPOOR
showing pads for
rutting over smooth
rocks.
Cast made at
Berkeley, 4/13/52
by P. Jones, O.